

Shuttle®



XPC cube SH570R8

POWERFUL WORKSTATION WITH INTEL 11th GEN

Empower Professional Applications with Reliability and Expandability

Shuttle XPC cube SH570R8 supports Intel® 11th Gen Core processors, integrated Intel® Xe engine and dual DDR4-3200 high-speed memory. It offers fast and reliable performance for professional users of demanding software applications. Designed with display flexibility and productivity, the SH570R8 supports up to three independent displays via HDMI 2.0 and DisplayPort 1.4. Featuring expandability to accommodate up to four 3.5-inch hard drives and PCI-E 4.0x16 for a graphic card or other add-on cards expansion makes the SH570R8 suitable for content creators, media streamers, and professional designers.



4K UHD



TRIPLE DISPLAY



DUAL SLOT




NONSTOP



FEATURES

- Supports Intel® 10th/11th Generation Core processors
- Supports up to 128GB of DDR4-3200 RAM
- Dual Intel® Gigabit LAN, supports Wake On LAN and Teaming Mode function
- Equipped one PCIe 4.0x16, one PCIe 3.0x4 and one M.2 Socket
- Provided 4x USB 3.2 Gen 2, 4x USB 3.2 Gen 1 (including one with Type-C) and 4x USB 2.0
- Three 4K displays via one HDMI 2.0b and two DisplayPort slots

www.shuttle.com

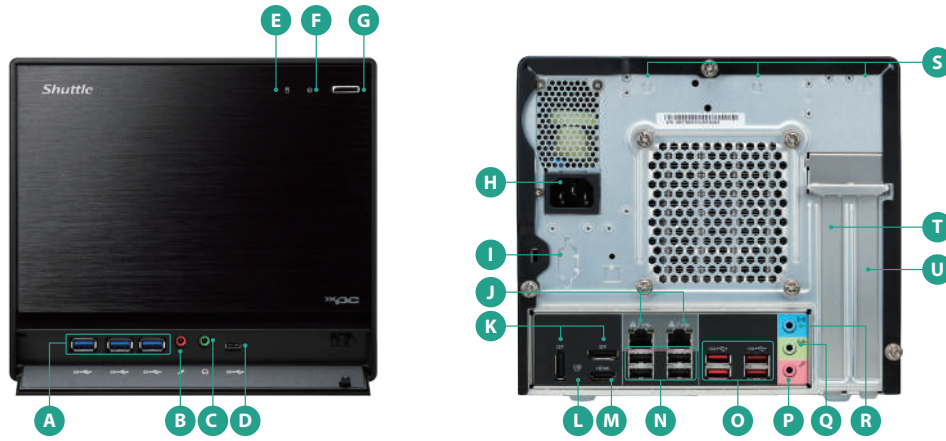

- A** USB 3.2 Gen1 Type-A port
- B** MIC-in
- C** Headphones
- D** USB 3.2 Gen1 Type-C port
- E** Hard disk drive LED
- F** Power LED
- G** Power button
- H** AC power socket
- I** Serial port (optional)
- J** LAN port
- K** DisplayPort
- L** Clear CMOS & Power Button & +5V
- M** HDMI 2.0 port
- N** USB 2.0 port
- O** USB 3.2 Gen2 Type-A port
- P** Microphone jack
- Q** Front speaker out (L/R) port
- R** Line-in port
- S** Perforation for optional WLAN
- T** PCIe x16 slot
- U** PCIe x4 slot

SPECIFICATIONS

Model		SH570R8
CPU		Intel® Rocket lake- S / Comet lake- S LGA1200 socket Core i3/i5/i7/i9, Pentium, Celeron 125W processor
Chipset		Intel® H570
Video Engine Processor		11 th processor support Intel® Xe graphic 10 th processor support Intel® UHD Graphics
Max Resolution		HDMI 4096 x 2160@60Hz (RKL-S) HDMI 4096 x 2160@30Hz (CML-S) DisplayPort 4096 x 2160@60Hz
Memory		4 x DDR4 3200/2933/2666 MHz, Max. 128GB
Storage		4 x 3.5" HDD
Expansion Slot	PCI Express Slots	1 x PCI-e x 16 Gen. 4.0 1 x PCI-e x 4 Gen. 3.0
	M.2	1 x M.2 2280, M Key 1 x M.2 2230, E Key
Audio		HD 5.1 channel
Video Output	HDMI Port	1 x HDMI 2.0
	DisplayPort	2
	VGA Port	-
I/O Port	USB 3.2 Gen1(Front)	4 (Include Type C x1)
	USB 2.0 (Front)	-
	USB 3.2 Gen1/Gen2 (Rear)	-/4
	USB 2.0 (Rear)	4
	Line in/Line out/Mic in	1 / 2 / 2
Network	LAN	2 x Intel® Gigabit LAN
	Wifi	Optional (WLN-M)
Dimension (L/W/H) mm		332 x 216 x 198
Weight	NW (kg)	3.5
	GW (kg)	5
Certification		CB, CE, BSMI, cTUVus, FCC, RCM, RoHS, VCCI
Operating Temperature (°C)		0~40
Chassis		Aluminum
Power Supply		500W 80 Plus Gold Flex ATX
Operating System		Windows 10 64bit, Linux
Optional Accessories		WLN-M, PHD3